



D Range | undercounter



D401




D501



D515 WS

- n ■ 2 year warranty
- n ■ D range targeted at volume market requirements
- n ■ D515 WS with internal automatic water softener
- n ■ Drain pump fitted as standard on all models
- n ■ Wash tank designed to reduce water usage
- n ■ Low running costs due to improved rinse efficiency
- n ■ Surface scrap trays as standard
- n ■ Soft touch controls with bright LED display
- n ■ Twin traffic light display indicates machine status
- n ■ Accurate detergent and rinse aid peristaltic dosing as standard
- n ■ Three selectable cycle options plus special application cycles options
- n ■ Selectable cycle to change operation on 500mm rack models for plate washing
- n ■ Selectable PRO LONG cycle for super intensive wash or for glass renovation on 500mm rack machines
- n ■ Automatic self-cleaning cycle
- n ■ D501 & D515 WS full double skinned for noise and reduced heat loss
- n ■ All machines are supplied with two racks

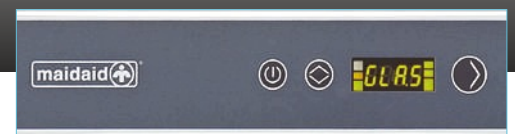

Technical

- n ■ Standard voltage 240V – single phase
- n ■ All D500 models can be supplied for 3 phase
- n ■ Suitable for hot (max 50°C) or cold* water supply at 2 to 4 bar dynamic supply pressure
- n ■ Wash temperature 60°C (adjustable)
- n ■ Rinse temperature D401 65°C (adjustable)
- n ■ Rinse temperature D501 & D515 WS 78°C (adjustable)
- n ■ Cycle times between 70 & 240 secs, dependent on model

Drain pump versions require a waste up-stand for correct operation.

Restrictive waste connections should be avoided for all installations.

*Machines fitted to cold water supplies will not be capable of running repeated short cycles, the cycle time will automatically be extended to allow recovery of correct operating temperatures.

Model	Rack size mm	Useable Height mm	Dimensions mm W x D x H	Cycle Options	Power kW	Amps Required
D401	400	275	455 x 560 x 700 [#]	3 Cycles	2.9	13
D501	500	255	600 x 605 x 715 [#]	3 Cycles	2.6/4.5/6.5	13/20/30 ^{##}
D515 WS	500	355	600 x 605 x 815 [#]	3 Cycles	2.6/4.5/6.5	13/20/30 ^{##}

Height excludes adjustable feet which will add 10 to 20mm.

Machines will be supplied for 30 amp supply as standard, if 13 or 20 amp ordered they will be supplied with original cable and without plug. Standard 13 amp UK 3 pin plugs will be **unsuitable** for cable supplied.

It is strongly recommended that 500mm machines are installed on hot water fill (max 50°C) for optimum performance.