


Bottom Mounted Uprights GR Series

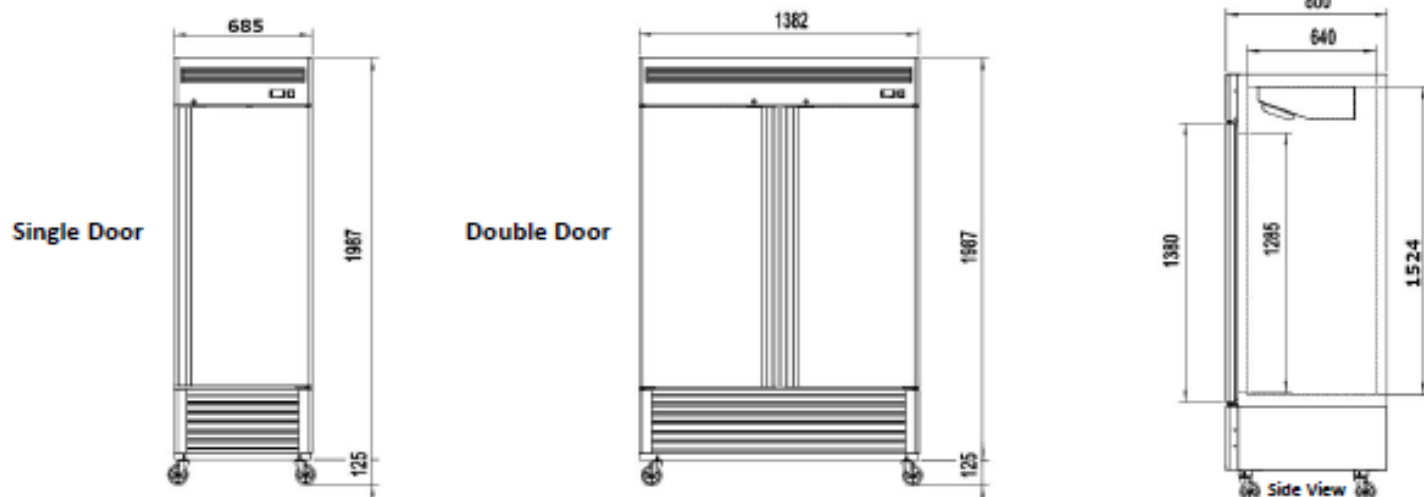

Model	MBF8185GR	MBF8181GR	MBF8187GR	MBF8183GR
Exterior Dimension (WxDxH) mm	685 × 800 × 2135	685 × 800 × 2135	1382 × 800 × 2135	1382 × 800 × 2135
Interior Dimension (WxDxH) mm	565 × 640 × 1525	565 × 640 × 1525	1262 × 640 × 1525	1262 × 640 × 1525
Packing Dimension (WxDxH) mm	730 × 840 × 2250	730 × 840 × 2250	1425 × 840 × 2160	1425 × 840 × 2160
Shelf Dimensions mm	530 × 650	530 × 650	530 × 650	530 × 650
Shelf Quantity	4	4	8	8
Shelf Loading Capacity (Kg Pc)	40	40	40	40
Capacity (Litre)	610	610	1300	1300
Net Weight (Kgs)	115	122	185	190
Gross Weight (Kgs)	131	136	202	208
Voltage (V/HZ/PH)	220/50/1	220/50/1	220/50/1	220/50/1
Power (Watts)	220	600	350	980
Electrical Current (Amps)	1.1	3	1.8	4.5
KWh/annum	555	2416	1011	3865
Energy Efficiency Class	C	D	C	D
Climate Class	5	5	5	5
Defrost Method	Air Defrost	Hot Gas Defrost	Air Defrost	Hot Gas Defrost
Refrigerant Type / Amount	R600a / 110g	R290hc / 120g	R600a / 140g	R290hc / 150g
Cooling Method	Ventilated	Ventilated	Ventilated	Ventilated
Inner Temperature (°C)	+2°C to +8°C	-17°C to -21°C	+2°C to +8°C	-17°C to -21°C
Insulation	Polyurethane foam	Polyurethane foam	Polyurethane foam	Polyurethane foam
Foaming Material	C5H10	C5H10	C5H10	C5H10
Castors	4 (2 Braked on front)	4 (2 Braked on front)	4 (2 Braked on front)	4 (2 Braked on front)
Material External / Internal	S/S Int + Ext	S/S Int + Ext	S/S Int + Ext	S/S Int + Ext
Lighting	Yes	Yes	Yes	Yes
Door lock	Yes	Yes	Yes	Yes